

Label printer settings

Brother label printers

Windows 11: First install the driver. You will find this on the USB stick supplied under *Useful information/Brotherdriver/Win11*. Follow the installation instructions.

Alternatively, you can find the latest drivers online at the [Brother Solution Center](#).

Setting up in the Apo-Ident software

If you have installed the drivers successfully, you can now choose your printer from the **Standard label printer** list (Brother QL-700 or older models) under **Label Printer Settings**

Continuous Paper Settings DK-22205

Choose the following settings:

- Page size: 62mm
- Orientation: Rotated by 0°

Advanced Layout Settings:

- Label width / mm: 62.0
- Label height / mm: 35.0
- X-offset / mm: 0.0
- Y-offset / mm: 0.0
- Scaling factor: 1.00


Now click on the left **tool icon** „Printer settings“. Change the following settings in the dialogue window that opens:

- Paper Size: 62mm
- Length: 35.0
- Belt feed: 3.0
- Alignment: Portrait format
- Quality: Prioritise print quality 300 x 300 dpi

Click first on **<Apply>** and then confirm with **<OK>**. You are now back in the settings of the Apo-Ident software.

Note: You can check your settings by starting a test print. To do this, click on the middle icon “Test printing”.

If your test print was successful, click **<Close>**. Your settings are accepted and saved.

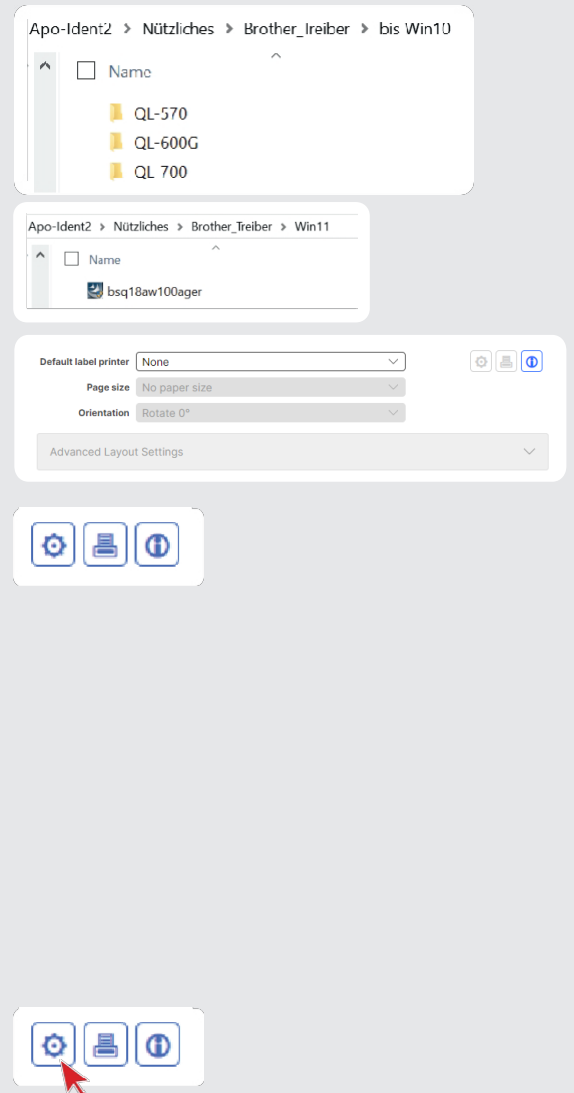

Settings for single labels DK-11201

Choose the following settings:

- Paper Size: 29 mm x 90 mm
- Orientation: Rotated by 90°

Advanced Layout Settings:

- Label width / mm: 29.0
- Label height / mm: 89.9
- X-offset / mm: 0.0
- Y-offset / mm: 0.0
- Scaling factor: 1.00

Now click on the left **tool icon** „Printer settings“. In the dialogue window that opens, modify the following settings:

- Paper size: 29 mm x 90 mm
- Alignment: Portrait format
- Quality: Prioritise print quality 300 x 300 dpi

Click first on **<Apply>** and then confirm with **<OK>**. You are now back in the settings of the Apo-Ident software.



Note: You can check your settings by starting a test print. To do this, click on the middle icon “Test printing”. If your test print was successful, click **<Close>**. Your settings are accepted and saved.

Installation of the driver software for DYMO LabelWriter

First install the driver. You will find these online at the [DYMO Support Center](#). After installing the printer driver, connect the printer to your PC.

Settings for single labels 99012

Select the following settings under **<Settings>**
<Label printer settings>:

- Default label printer: DYMO LabelWriter 450
or DYMO LabelWriter 550
- Page Size: 99012 Large Address
- Orientation: Rotate 0°

Advanced Layout Settings:

- Label width / mm: 35.8 mm
- Label height / mm: 88.4 mm
- X-offset / mm: 0 mm
- Y-offset / mm: 0 mm
- Scaling factor: 2.20

Now click on the left tool icon **<Printer settings>**.
Change the following settings in the dialogue window that opens:

- Orientation: Landscape
- Page Order: Front to back

Click **<Advanced>** to make the following setting:

- Paper/Output: 99012 Large Address

Click first on **<OK>** and then confirm with **<OK>**. You are now back in the settings of the Apo-Ident software.

Note: You can check your settings by starting a test print. To do this, click on the middle icon **<Test printing>**. If your test print was successful, click **<Close>**. Your settings are accepted and saved.

Note: These instructions only apply to the label printer DYMO LabelWriter 450/550 with labels 99012. With other DYMO models (e.g. Turbo, Twin Turbo, etc.) the label settings may differ.

